




STANDARD DOOR SET UP

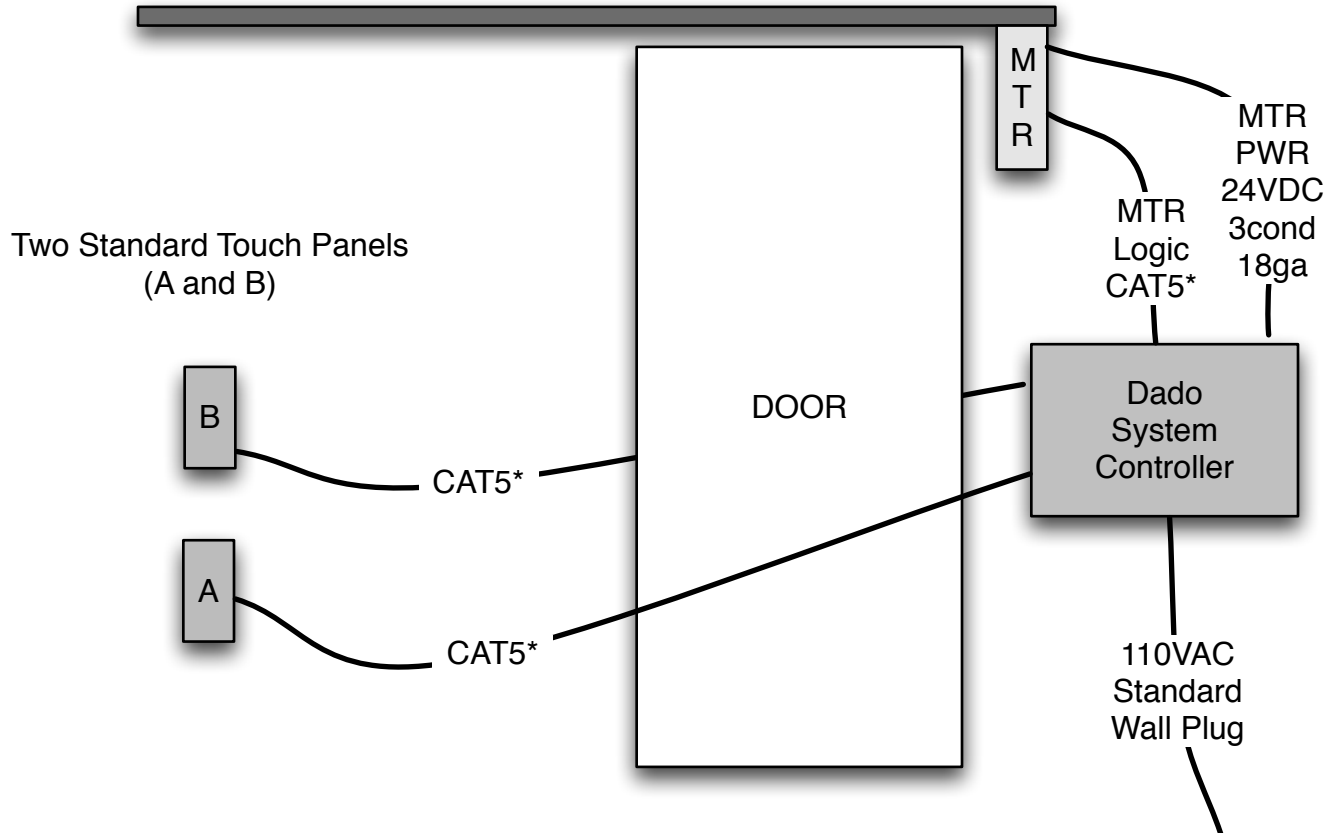


The Motor Power cable is provided by Dado Door and is a 3 conductor 18 gauge cable with special connectors.

IMPORTANT NOTE:

All CAT5 MUST be straight through wiring, Do not use internet cables which may contain cross over wiring configurations.

Damage can result if using wiring that is not pin for pin the same color.

Dado Door Motor Cable Diagram

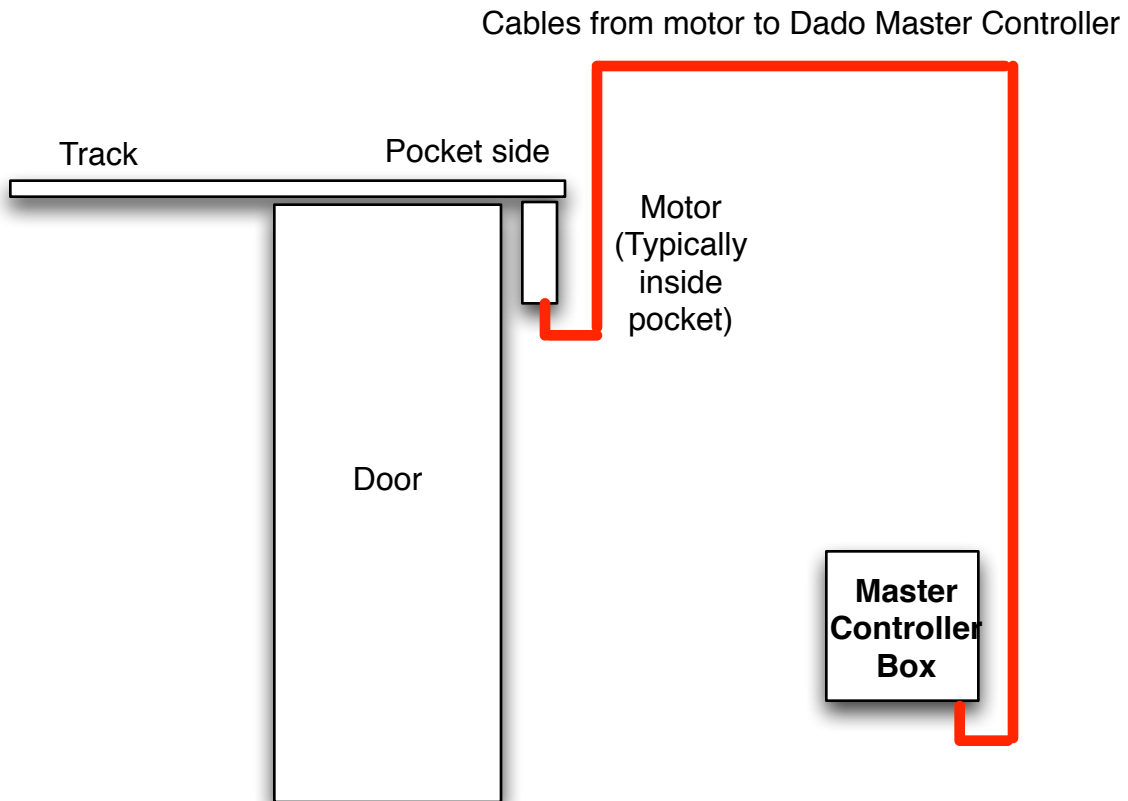

The Dado Automation Master Controller is mounted somewhere in the vicinity of the motor. Often a cabinet, closet, storage room etc is used. The Master controller will require access, easier access means easier the setup.

Cables from motor to Dado Master Controller include a CAT5 cable with special wiring protocol, plus a 3 conductor 18G power cable for the 3 phase motor power. These cables will be provided to spec with your system with the shortest possible length. Please specify the wiring length as shown and allow for some slack on each end. It is ideal to place the Master Controller within a 20' cable length maximum. Longer cables have been used, consult with Dado Door if your conditions require a longer cable run.