
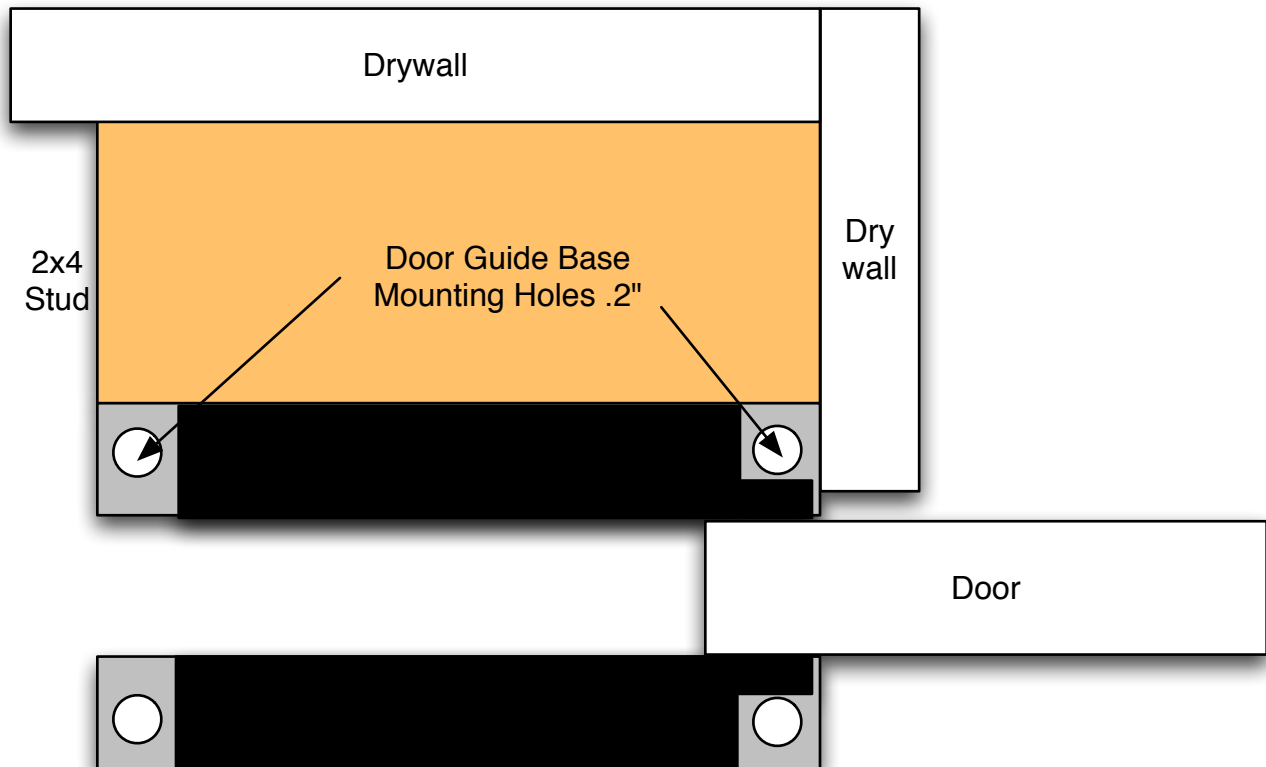


# Dado Door

## Glass Door Guide Installation


The door guide consists of two parts: A. the Lower Base Section and B. The Top Adjustable Guide Plate.

The door guides are designed to mount in one of several methods. A. Direct to a floor surface or B. A wood block that attaches to the inside of the studs at the pocket opening. The wood block may be used in a case where the floor surface is not an option due to the inability to attach screws to the floor (ie a tile or concrete floor).

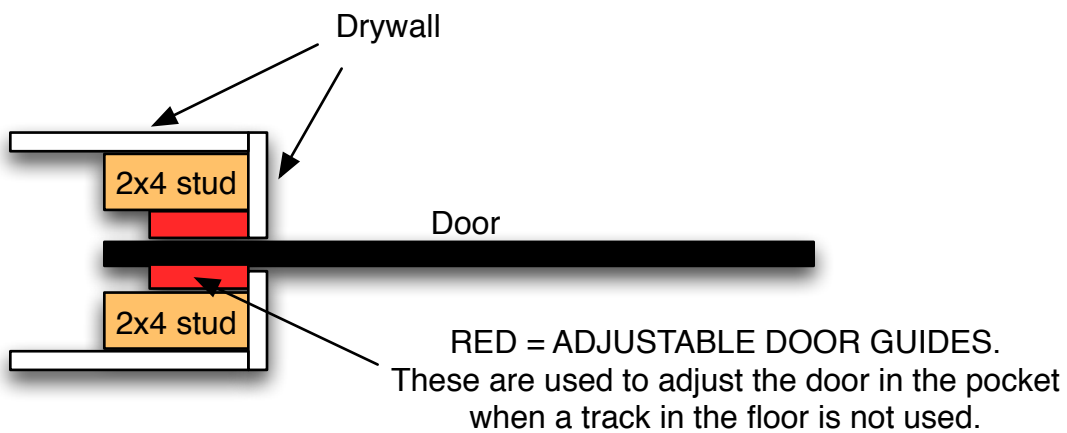

The photos below illustrate the two methods of attachment. The goal is to mount the guides as close to the trim material as possible. Typically the door will have an excess of 1" of width to allow the pocket side of the door to sit inside the pocket into the guides. In cases where the trim material is very thick, the door guide may need to be recessed into the trim so that the door does not at any time move past the guides and lose support.



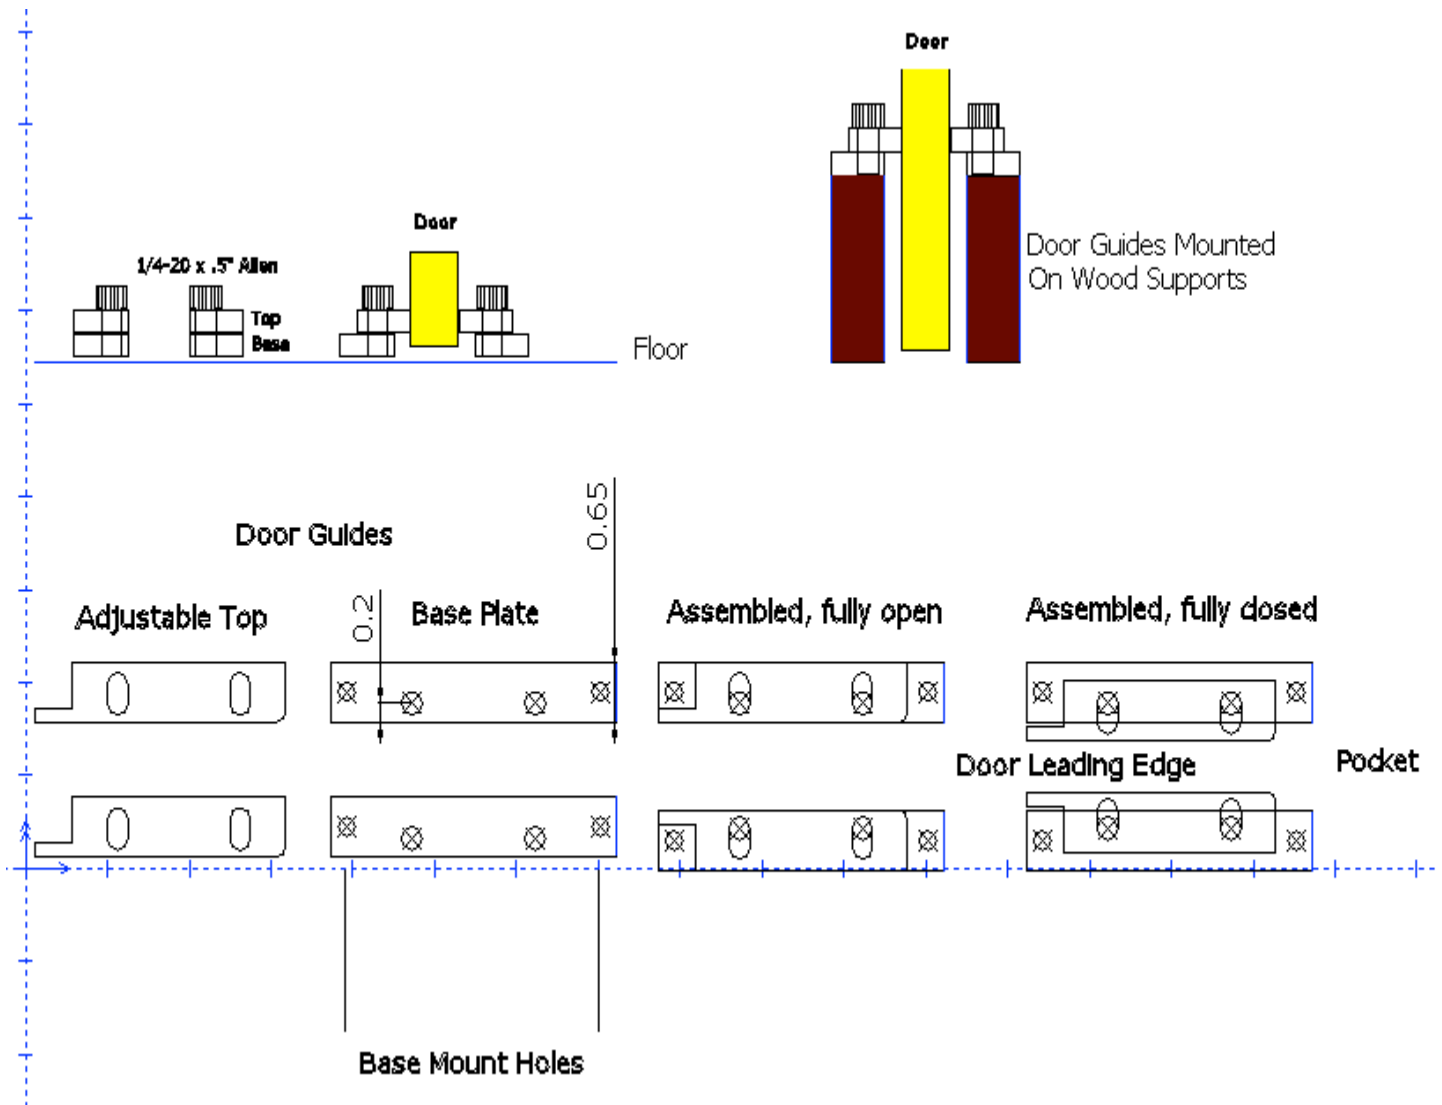

See Door Guide CAD files